
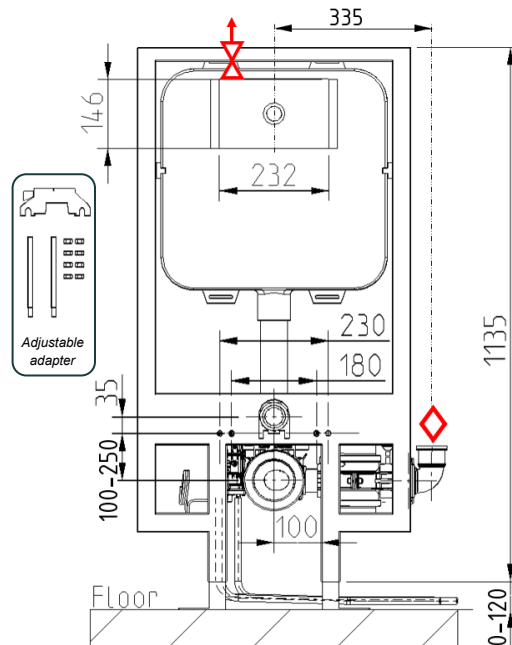


N11822233 VACUCONVERT

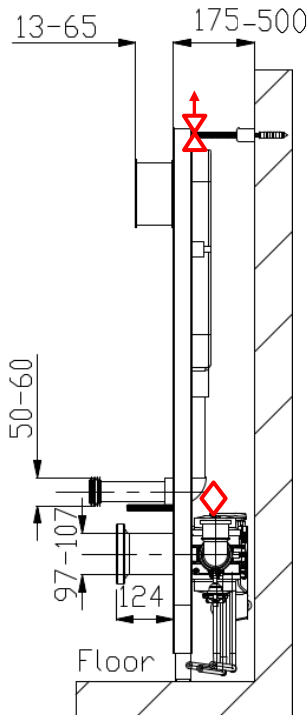

Rendering shown with plasterboard

Materials

Frame: steel (painted)
 Piping and valves; plastic parts: PP, rubber parts: NR



Dimensions

Width: 580 mm
 Depth: 175 - 500 mm
 Height: 1140 - 1260 mm

Operating data

Water supply pressure: 0.3 – 10 bar
 Water consumption: 2.1 – 2.3 L/flush (dependent on bowl)
 Tested maximum lift: 4 m

System Connections

Inlet water supply: G1/2", indicated as 
 Discharge connection: Ø50 mm ID, indicated as  (network piping: Ø50 mm OD)
 Discharge connection on right OR left side of Vacuconvert (shown here on right)

Toilet Connections

Inlet: Ø55±5 mm
 Outlet: Ø102±5 mm (vertical placement of outlet is adjustable)

Weight

22.0 kg

Gravity bowl compatibility

Most wall-mounted toilets, and most floor-mounted toilets with P-trap (outlet directed towards the wall, not floor).
 Contact Evac for bowl compatibility and flush volume setting.
 Width of toilet bowl mounting bolts: 180 mm / 230 mm.
 Toilet connection outlet is ADJUSTABLE in the vertical direction

